



MI	Code	Ean Code	Pcs
750	1PN750	8020089997727	12
2000	1PN002	8020089997710	6
5000	1PN005	8020089997703	4

TERRA

**ANTI MACCHIA
PER SUPERFICI
ESTERNE IN COTTO**

**ANTI STAIN
FOR EXTERNAL
TERRACOTTA**

**PAVIMENTI IN COTTO
COLONNE - VASI
ANFORE - TEGOLE**

**PAVEMENTS - COLUMNS
VASES - AMPHORA
ROOFING TILES**


Treatment anti stain specific for external terracotta surfaces such as pavements, tiles and vases in traditional, rustic or antique terracotta. The product penetrates deep inside the surface pores leaving the surface protected against various staining substances such as: oil, coffee, water and atmospheric conditions.

Antistain treatment specific for external terracotta surfaces such as pavements, tiles and vases in traditional, rustic or antique terracotta. The product penetrates deep inside the surface pores leaving the surface protected against various staining substances such as: oil, coffee, water and atmospheric conditions.

Vantaggi

Advantages

- **Traspirante**
- **Resiste ai raggi UV**
- **Antigelo**
- **Facile da utilizzare**
- **Non altera l'aspetto naturale del cotto**
- **Non ingiallisce**
- **Breathable**
- **Non yellowing**
- **Maintains natural effect**
- **UV resistant**
- **Easy maintenance**
- **Anti freeze**

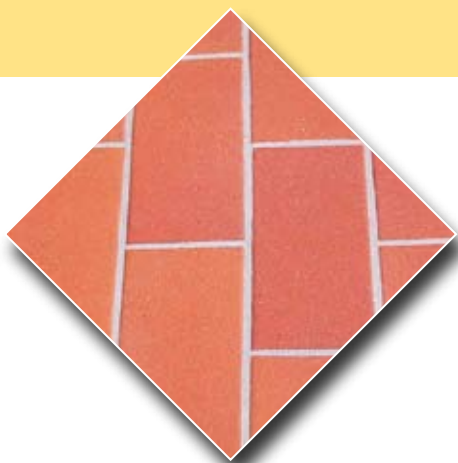

Modo d'uso



Applicare su superfici perfettamente pulite e asciutte (per pavimenti già in opera, utilizzare POWER CLEAN per la pulizia preventiva mentre per le nuove superfici utilizzare C100). Attendere una perfetta asciugatura. Stendere il prodotto in modo uniforme sulla superficie da trattare con Maialino o Pennellessa. Lasciare asciugare almeno 3 ore prima di effettuare una 2ª applicazione di prodotto. Attendere 24 ore prima di utilizzare la superficie.

How to use



Apply to perfectly dry and clean surfaces (for existing floors, use POWER CLEAN diluted in water using a ratio of 1:30 for surface pre clean; to remove cement and grout film from newly fixed floors, use C100 as directed). Allow the floor to dry completely. Apply the product in a uniform way to the surface to be treated by brush, cloth or spray. Leave to dry for 3 hours before proceeding with the second coat of product. Allow 24 hours for complete drying before using the treated surface.

Resa

Il consumo indicativo varia da 4-12 m²/litro.

Coverage

Indicated coverage varies from 4-12 m²/litre.